

SPREADER DITCHER



SPREADER DITCHER

Special Features


The Spreader Ditcher is a highly versatile machine that is used to plow heavy snow, spread ballast, reshape cuts in banks, and cut trackside ditches. At 160,000 lbs., and 53 feet (16.1 m), it is equipped with an operator control cab, front plow, side wings, two non-powered bogies, AAR couplers, and an APU for electrical / hydraulic power. It is pushed by one or multiple locomotives to achieve maximum traction at speeds for desired plowing effectiveness.

Features & Benefits

- Heavy construction with low center of gravity
- Standard Front Plow
- In cab controls:
 - Front plow locks
 - Wing locks
 - Front plow depth control
- Comfortable cab, seating for 5
- FRA Type I Heated Windshields
- FRA Type II Sliding Side Egress Windows
- AC & Heat
- AC Generator

Available Options:

- High snow plow
- Long wing for maximum clearing
- Short wing for restricted clearances
- Straight Wing without Ditcher Section
- Bank sloper
- Front plow ice cutting
- Wing Ditcher Section
- Locomotive controls
- Powered front cross plow with in-cab controls
- Enclosed Walkway

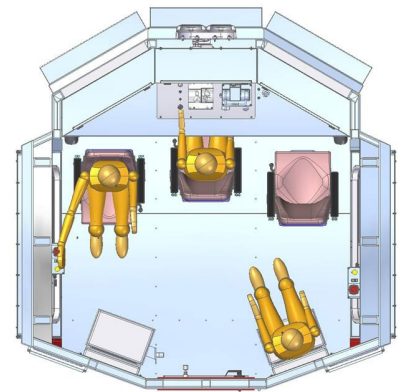



Ballasting

The wing ballast section can be set to cut the fouled ballast from the ends of ties. Ballast can also be carried and distributed along the track. The Spreader Ditcher can plow in center, right, or left hand direction while retrieving ballast deposited outside the toe line.

Ditching

The ditcher section deploys in seconds from the main wing. This allows the machine to create new ditches with precise accuracy or clean out existing ditches in a similar manner. Good ditching provides drainage around and along the track regardless of railway grade.

Profiling and Contouring

Establishing a true roadbed cross section, the Spreader Ditcher slopes the banks and carries material from cut to fill in one operation. The machine can uproot heavily vegetated areas near roadways, widen cuts, and build up or prepare sub-grades for adjacent track construction.

Spreading

With the ability to widen embankments, level sub-grade, and remove fouled ballast, the machine effectively covers all spreading jobs with ease. It can work flood clean-up in yards and main line and clean windrow dirt from crib excavations or ballast cleaning.

Ice and Snow Removal

The Spreader Ditcher High Plow can clear 16 foot (4.9 m) snow drifts, and widens snow cuts with main wings and bank slopers. It has the ability to rip solid blue ice and handles slides mixed with rock, stumps, and frozen matter. The machine also cuts snow ditches for thaws and spreads snow in classification and switch yards.

Special Application

Developed over a century ago, the Spreader Ditcher has seen many changes through the decades, including converting from Air to Hydraulic operation in the 1960's. The latest development builds on the strong past and brings in updated to meet today's market requirements. The machine conquers all spreading, ditching, and plowing jobs encountered on the track.

SPREADER DITCHER

Specifications

| | |
|-------------------------------------|---|
| Gauge | Standard |
| Weight Basic Machine (Less Options) | 160,000 lbs. (72,500 kg) |
| Length | 53 ft. (16 m) |
| Travel Width | 10 ft. 8 in. (3 m) Max |
| Height | 15 ft. 4 in. (4.7 m) Max |
| Wheels | 33 in. (838 mm) AAR Standard |
| Journal Bearings | 6 x 11 Roller Bearings |
| Engine | CUMMINS QSB 4.5, Tier 3; 110 HP @ 1800 RPM |
| Electrical Power | 24 VDC, 90 Amp Alternators 20kW, 120/240 Volt, Single Phase |
| Hydraulic Power | Double Pump, 23GPM per Section at 1800 RPM, 1800 PSI Max |
| Pneumatic Power | Supplied from locomotive |
| Braking | AAR Standard (ABDW or DB60 Valve) |
| Speed | 50 mph (80 km/h) |
| Hydraulic Reservoir Capacity | 79 gal. (299 liters) |
| Fuel Reservoir Capacity | 100 gal. (378 liters) |

Download full specs at www.harscorail.com
 Watch video at www.youtube.com/user/harscorail

Harsco Rail Global Headquarters

3440 Torrington Way
 Suite 100, Building 3
 Charlotte, NC 28277, USA

Main Tel: +1 803 822-9160
 Email: railinfo@harsco.com
www.harscorail.com

Bulletin #S-01B-0116
 Updated in USA, September 2018



Harsco Rail, Harsco Corporation Facility Locations:

Harsco Rail Global Headquarters
 3440 Torrington Way
 Suite 100, Building 3
 Charlotte, NC 28277, USA
 Tel: +1 980 960-2624
 E-Mail: railinfo@harsco.com

Harsco Rail Manufacturing Operations
 2401 Edmund Road, Box 20
 West Columbia, SC 29171-0020, USA
 Tel: +1 803 822-9160
 E-Mail: railinfo@harsco.com

Harsco Rail Engineering Center
 306 West 4th Street
 Fairmont, MN 56031-1837, USA
 Tel: +1 507 235-7376
 E-Mail: railinfo@harsco.com

Harsco Rail Manufacturing Operations
 200 South Jackson Road
 Ludington, MI 49431, USA
 Tel: +1 231 843-3431
 E-Mail: railinfo@harsco.com

Protran Technology
 1960 Old Cuthbert Road
 Suite 100
 Cherry Hill, NJ 08034, USA
 Tel: +1 856 779-7795
 E-Mail: info@protrantech.com

Harsco Rail Pty Ltd Australia
 4 Strathwyn Street, P.O. Box 5287
 Brendale
 Queensland 4500, Australia
 Tel: +61 7 3205 6500

Harsco Rail Ltd United Kingdom
 Unit 1, Chewton Street, Eastwood
 Nottingham NG16 3HB, United Kingdom
 Tel: +44 (0) 1773 539480
 Email: uksales@harsco.com

Harsco Rail Ltda Brazil
 Av. Marechal Câmara, 160 / 1615,
 Centro
 Rio de Janeiro RJ 20020-080, Brazil
 Tel: +55 21 2510-5164 / -5151

Harsco Rail Europe GmbH
 Luetticher Str. 130
 40547 Duesseldorf, Germany
 Tel: +49 (0) 211 60116 0
 E-Mail: info@harsco-r.de

Harsco Rail China
 Room C1201 Tower 2,
 No.36 BeiSanHuan Dong Lu,
 DongCheng District,
 Beijing 100013, P.R. China
 Tel: +87 10-6590-6399

Harsco Track Machines and Services
 Private Limited India
 2nd Floor, Building Alpha,
 Bengal Intelligent Park Block EP & GP,
 Sector V, Salt Lake, Kolkata
 700091 West Bengal, India
 Tel: +91 33 2357 5651

The HARSCO RAIL equipment pictured in this brochure is intended to illustrate the general appearance and features of this product. It is equipped as specified by a particular customer and may or may not show items that are optional or recommended by HARSCO RAIL, Harsco Corporation. Specifications, illustrations, and descriptive materials herein were accurate as known at the time this publication was approved for printing. HARSCO RAIL, Harsco Corporation reserves the right to discontinue models or options at any time or change specifications and materials, equipment and design without notice and without incurring obligation. Federal, State or Provincial, and/or local laws and regulations may require additional equipment for the particular use intended for this product. It is the buyer's responsibility to determine the applicability of such laws and regulations to the buyer's intended use for the product and to arrange for the installation of the required equipment. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies and/or mark holders.